



Flexicam


for location and studio digital photography



© Pietro Savorelli

Technical information

| | |
|-----------------------|---|
| dimensions | H. 180mm - L. 188mm - D. 162mm |
| weight | 1kg. camera body - 543gr. sliding back adapter |
| vertical & side shift | Rise 23mm - Fall 23mm - Side shift 15mm + 15mm |
| tilt | Tilt 15+15 micrometric adjustment with locking system. |
| swing | Swing 15+15 micrometric adjustment with locking system. |
| lens focusing | Focusing by mean of the auto-locking micrometric rail. |
| rail excursion | 90mm with click and micrometric adjustment. |
| standard adjustment | Possibility to move back the camera standard in order to clear wide angle lenses. |
| bellow | Cylindrical and bag combined bellow. |
| material | Made in high grade anodized aluminium. |
| lens attachment | Lens mounted on Silvestri bayonet. |

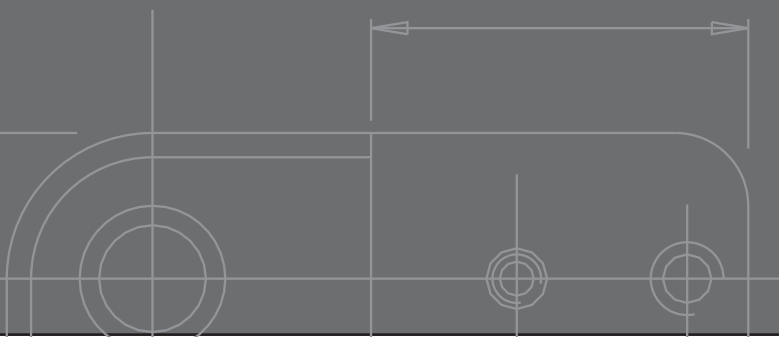

silvestri



Flexicam

If your work or your passion demands quality photography using high resolution digital backs, the Silvestri Flexicam is the right choice. Flexicam is a camera from the very latest generation, with this camera we want to fulfill the needs of flexibility and compactness of those photographers working outdoors but who do not want to compromise on precision and quality. Flexicam performs the correction movements necessary for the perspective, controlling and focus extension in architectural, still life, industrial photography etc.



Silvestri presents a new camera specifically designed for digital photography. Our ability in conceiving specific and specialized products has been realised in our new project: the FLEXICAM.

Flexicam is an extremely compact and light camera, suitable for both outdoor and studio photography. Its well known compactness and extreme versatility will make it the best choice for architectural and travel photographers. Wide movements and a large range of accessories, flexibility and ease of transport, full compatibility with the Silvestri accessories, large choice of lenses and adapters for digital applications.

New fitting systems for the back accessories, a new extra compact sliding adapter of new concept and a shooting system that allows the use of Hasselblad V lenses have been designed for the Flexicam.



System chart



Compact and light-weight view camera with full movements





Lenses

Rodenstock and Schneider lenses in Copal 0, Prontor Magnetic and Schneider Electronic shutters.

Extension bayonet rings

These bayonet rings extend the bellow range of 15mm and 30mm respectively. They are used to get closer to the subject when the extension of the Flexicam or the Flexi Bellows are not sufficient.



C0102 Bayonet Ring extension 15mm
C0104 Bayonet Ring extension 30mm

Digital lenses in bayonet

| Rodenstock | Copal 0 | Prontor Magnetic | Schneider | Copal 0 | Prontor Magnetic | Schneider Electronic |
|-------------------------------|---------|------------------|----------------------|---------|------------------|----------------------|
| HR Digaron S 5,6/23mm | D7236 | 2323K | Digitar 2,8/28L | D7202 | 2329K | 2329KS |
| HR Digaron S 4,5/28mm | D7226 | 2234K | Apo Digitar 5,6/35XL | D7201 | 2240K | 2240KS |
| HR Digaron S 4/35mm | D7228 | 2236K | Apo Digitar 5,6/47XL | D7218 | 2248K | 2248KS |
| HR Digaron W 4,0/40mm | D7248 | 2346K | Apo Digitar 4/60N | D7206 | 2261K | 2261KS |
| HR Digaron S 4/60mm | D7234 | 2266K | Apo Digitar 5,6/72L | D7207 | 2273K | 2276KS |
| HR Digaron S 4/100mm | D7239 | 2268K | Apo Digitar 4/80N | D7208 | 2281K | 2281KS |
| Apo Sironar Digital 4,5/45mm | D7230 | 2245K | Apo Digitar 4,5/90N | D7212 | 2291K | 2291KS |
| Apo Sironar Digital 4,5/55mm | D7232 | 2255K | Apo Digitar 5,6/100N | D7214 | 2214K | 2214KS |
| Apo Sironar Digital 5,6/70mm | D7233 | 2276K | Apo Digitar 5,6/120N | D7216 | 2212K | 2212KS |
| Apo Sironar Digital 5,6/90mm | D7238 | 2293K | | | | |
| Apo Sironar Digital 5,6/105mm | D7240 | 2205K | | | | |

Filter Holder



3300 Wide Angle Filter Holder 100x100mm

Compendium



3205 Bellow Filter Holder Combination 75mm
3305 Bellow Filter Holder Combination 100mm



3200 Wide Angle Filter Holder 75mm
3300 Wide Angle Filter Holder 100mm

Adapter Rings



3306 Adapter Ring 40.5mm
3307 Adapter Ring 49mm
3308 Adapter Ring 52mm
3309 Adapter Ring 58mm
3310 Adapter Ring 67mm
3313 Adapter Ring 72mm
3315 Adapter Ring 77mm
3317 Adapter Ring 82mm
3318 Adapter Ring 86mm
3319 Adapter Ring 95mm

Actuator for Hasselblad V lenses

The Silvestri Actuator adapts Hasselblad lenses from the V series with Silvestri cameras for digital use. It performs the cocking and triggering functions normally executed inside the Hasselblad body. The generous image circles of Hasselblad lenses make them attractive when used with digital backs. Due to the lens weight, we suggest 50-60-80-120 & 150mm. Full corrective movements (shift, tilt, swing) are now available for those lenses.



1152 Actuator for Hasselblad V lenses with Silvestri bayonet - Short





© Pietro Savorelli

Shutters



Copal 0 : Mechanical shutter with manual loading, manual diaphragm setting, times from 1 to 1/500 + B and T poses.

Prontor/Silvestri n. 0 : Magnetic shutter with electronic control, it is activated by the Silvestri Remote Control Unit code 7020K. This type of shutter is needed with Multishot and Microstep digital backs. Selection of times from the remote control unit, selection of diaphragms from the shutter.

Schneider 0 shutter: Magnetic shutter with electronic control, it is activated by the Silvestri Remote Control Unit code 7053K: selection of times and diaphragms. Needed for Microstep and Multishot digital backs.

Remote Control Unit for Prontor and Schneider electronic shutters.



The Digital Remote Control Unit interfaces digital backs, controls the Prontor/Silvestri electronic shutters, the diaphragm opening with the new Schneider shutters. The Digital Control Unit allows to take 4 and 16 microstep shots with Imacon-Hasselblad Ixpress back. Works with Silvestri Electronic Sliding Adapters. Controls the Prontor and Schneider shutters a) single shot b) multishot with selectable times with increasing of 1/3 diaphragm c) Control full open d) Control of field depth with selected diaphragm e) during the depth controlling it is possible to change the work diaphragm.

code 7020K for Prontor shutters.

code 7053K for Prontor and Schneider shutters.

Rear Accessories



Sliding Back Adapters

Ultra-compact 6x6 Sliding Adapter: 21x10,5x2,3cm. - weight 543gr.
Available interfaces:

- F108 Hasselblad V
- F110 Hasselblad H
- F109 Mamiya 645 AFD
- F111 Contax 645

Viewers



F140 Easy bellow



7050K66 Reflex viewfinder



Sliding back, live-video and T2 adapters

Live Video Adapters

'Live video' adapter (not sliding). Available interfaces:

- code F112 Hasselblad V
- code F114 Hasselblad H
- code F116 Mamiya 645 AFD
- code F118 Contax 645



T2 Attachments



Flexicam can be accessoried specific adapters for the mounting of Canon EOS and Nikon cameras.

Flexicam transforms the camera in a small view camera that can perform perspective corrections and focus extension, essential movements in the work of still life, jewels, watches and industrial photography.

Compatible lenses, mounted in Silvestri bayonet:

Schneider Digital 2,8/28mm, Digital 4,5/90mm & 5,6/100mm.

Rodenstock Digital 5,6/90mm, 4/100mm HR & 5,6/105mm.

Both APS and full frame 24x36 cameras can be used. The image circle is very large and it ensures the possibility of wide correction movements.

- code F130 T2 attachment for Nikon
- code F132 T2 attachment for Canon



© Studio Braida



silvestri

Silvestri srl
via della Gora 13/5
50025 Montespertoli (FI) - Italia

phone: +39.0571675049
fax: +39.0571675919
e-mail: info@silvestricamera.com
www.silvestricamera.com